

Ding Fang

ding.fang@wur.nl

Motivation

Hydrogen sulfide (H₂S) produced from bioreduction of elemental sulfur (S⁰) possesses significant industrial value for applications, including metal recovery from acid mine drainage and serving as a sulfiding agent in hydro-treatment processes for renewable feedstocks. However, the high operational costs, low sulfide production rates, and its liquid phase nature limit the widespread industrial applications of this technology.

Biosulfur, formed through the partial microbiological oxidation of H₂S in bio-desulfurization reactors, is considered waste. Leveraging biosulfur as both the S⁰ and carbon source for sulfide production, along with its role as a pH buffer, enables substantial waste valorization. Moreover, biosulfur (Fig.1) is anticipated to exhibit a higher sulfide production rate compared to chemically produced S⁰ due to its high bioavailability.

Utilizing hydrogen (H₂) as both the electron donor (Eq.1) and stripping gas facilitates simultaneous H₂S production and stripping in a single bioreactor.

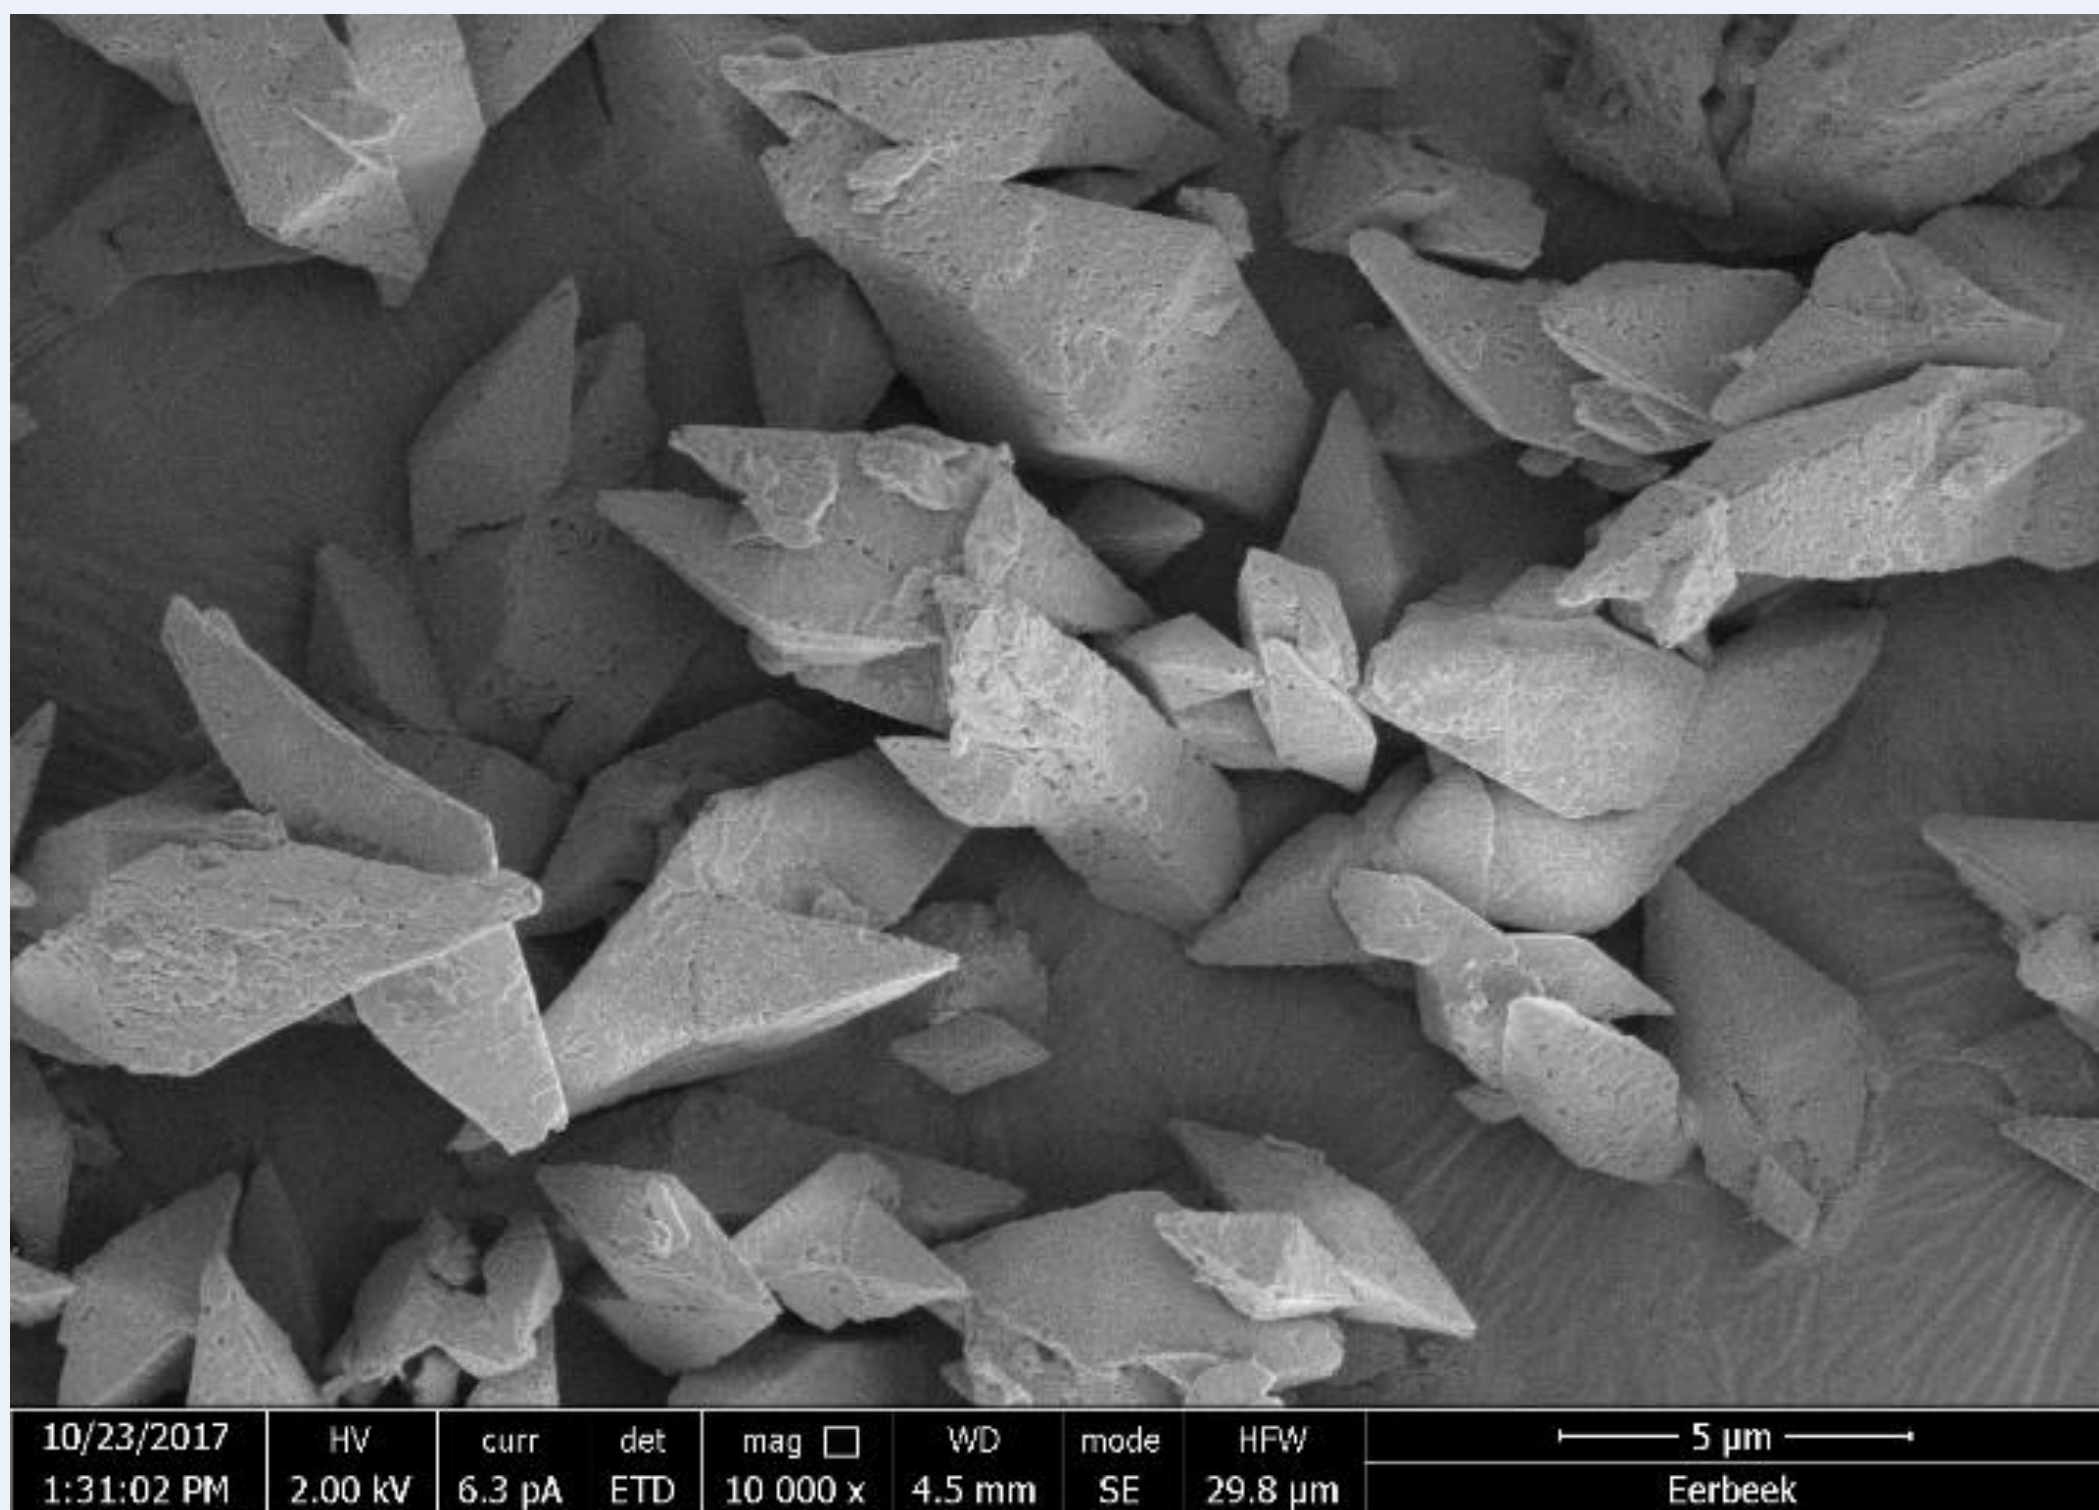
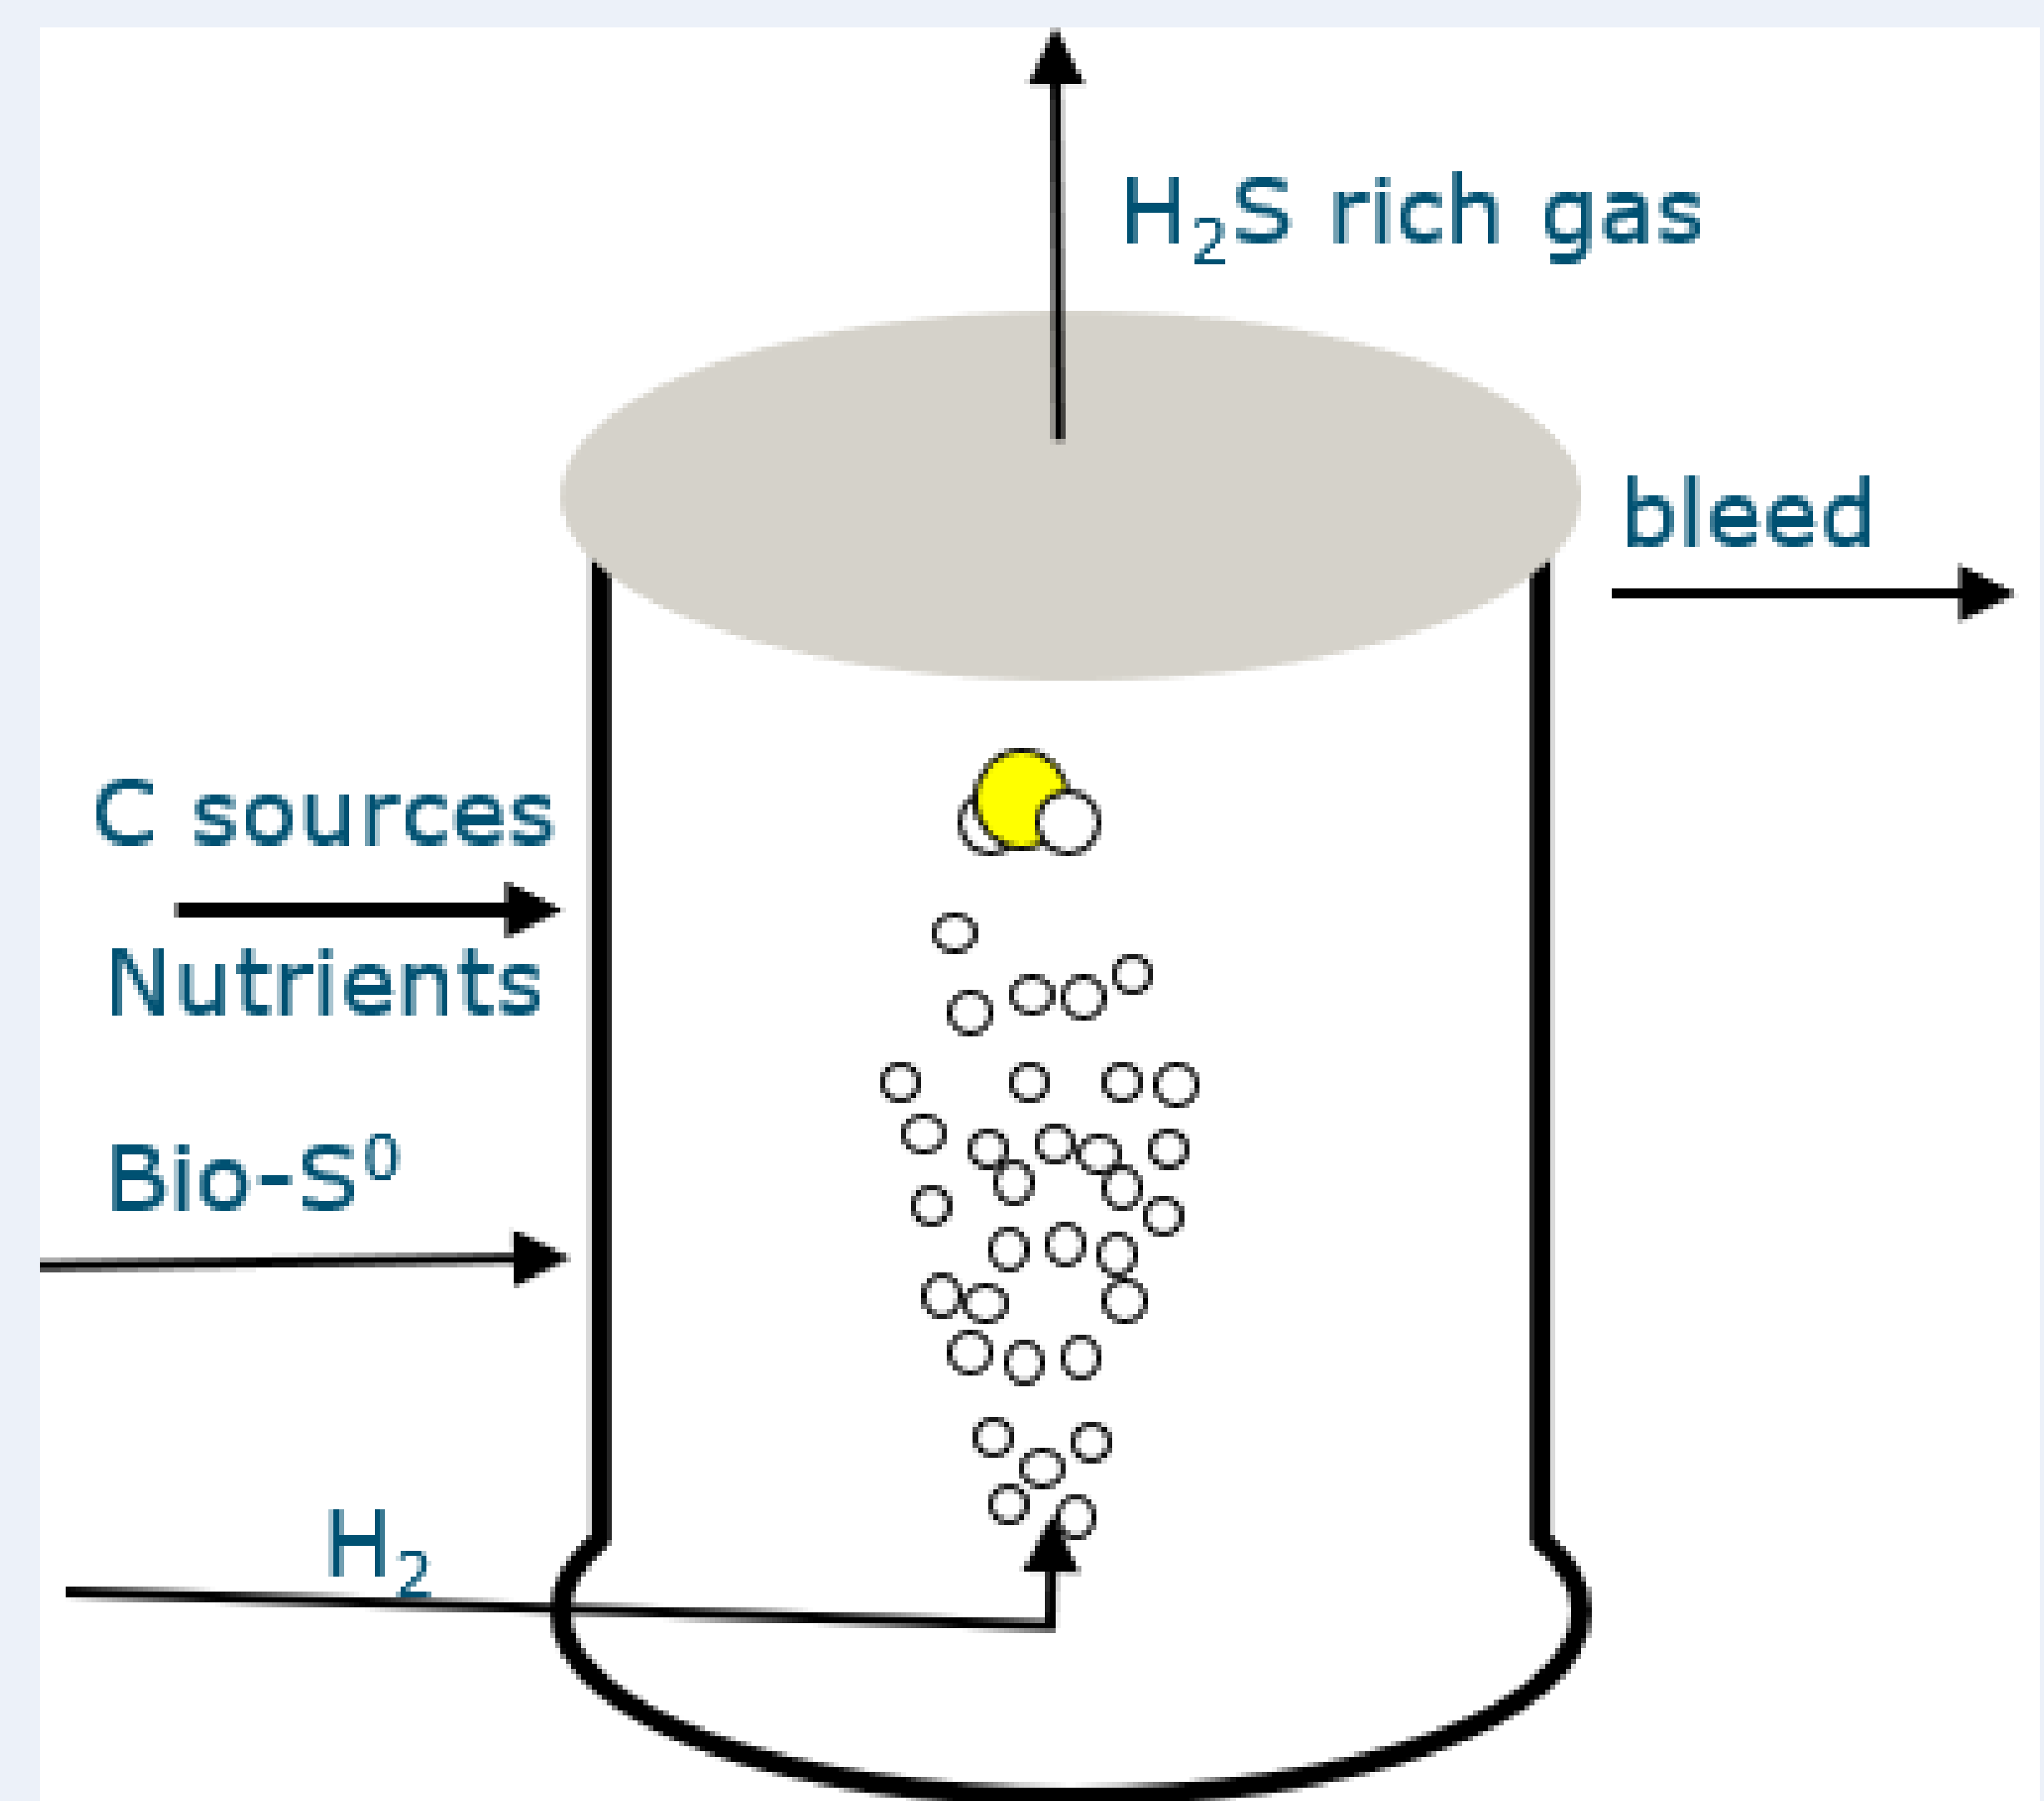


Fig 1. Biosulfur crystals

Technological challenge

CO₂ diminishes the sulfiding effects of H₂S and should therefore be minimized in the off-gas after stripping. In the bioreactor (Fig.2), the carbon source will eventually be stripped as CO₂, along with H₂S. However, insufficient carbon availability can inhibit the growth and metabolism of S⁰ reducers, ultimately reducing the rate of H₂S production. The key technological challenge of this research is achieving a high H₂S production and stripping rate while maintaining a low CO₂ concentration.

Fig 2. Scheme of S⁰ reducing bioreactor

Research goals

This research aims to utilize H₂ and biosulfur in an S⁰-reducing bioreactor for the production of gaseous H₂S, achieving high sulfide production/stripping rates. The ultimate goal is to enable cost-effective H₂S generation with minimal CO₂ concentration at an industrial scale. To achieve this, the research focuses on three key objectives:

- identify the rate-limiting steps and develop strategies to overcome them.
- Investigate the Influence of bicarbonate concentration on pH, CO₂ concentration, H₂S production rate and microbial activity.
- Determine optimal conditions for high-rate lithoheterotrophic H₂S production with limited CO₂ concentration.